

TEMPERING - COATING MACHINE

GOLD 2

CAPACITY: 24 kg

**CONTINUOUS 3-PHASE TEMPERING
(45° - 28° - 30° adjustable)**



Temperer with vibrating table

ADVANTAGES

- + Economical
- + Ultra-compact
- + Delayed start
- + Washable carrier

PRODUCTION




Tempered chocolate: 45 kg/h



Coated chocolates: 70 kg/day



Enrober with CHOCOPLAK belt

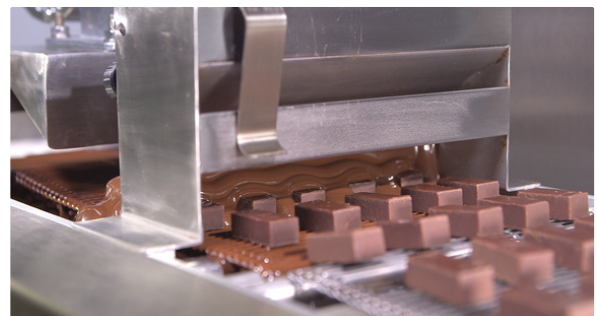

Discover in video



GOLD 2

TEMPERING - COATING MACHINE

FUNCTIONING

It is equipped with the 3-phase continuous tempering system with adjustment of the 3 settings (45° - 28° - 30°) which avoids any risk of thickening of the chocolate. Equipped with a conveyor assembly, it transforms into a real coating machine and with a vibrating table, into a molder.



TEMPERING

The machines are equipped with a refrigeration unit, a direct expansion exchanger, a tempering screw and the 3-phase tempering system. The controls are electromechanical with no electronics.


MOULDING

Vibrating table adaptable directly to the machine. Programmable dosage with foot pedal.

Dosing head option with 2 dosing plates.

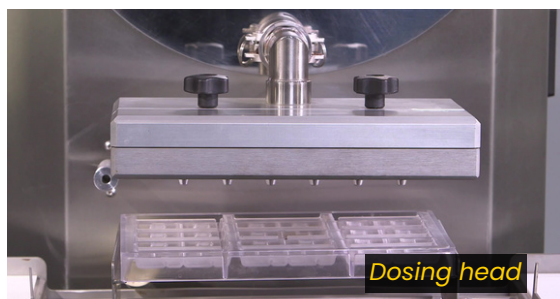

Touch control panel



COATING

The variable speed conveyor assembly is centered on the tempering machine. It is composed of a disengageable entry grid, a coating grid, a variable tapping and a pivoting tail cutter. The height-adjustable chute has 2 sails and the fan is adjustable in height and flow. The products are taken directly from the paper.

Partial coating and bottoming optional.
Production of 40 to 50 products per pass.



CONVEYORS

CHOCOPLAK: The weight driving the paper is supported on 2 toothed belts, the collection plate is already in place when the products arrive, all you have to do is cut the paper and take the plate with the products.

PAPER EXIT: The products are picked up on the paper driven by the belt of the exit conveyor attached to the coating conveyor. You have to slide the pickup plate then cut the paper.



TECHNICAL DATA

| | |
|----------------------------|--------------------|
| Capacity | 24 kg |
| Tension | 230V single |
| Power | 2800 W |
| Width of belt | 220 mm |
| High. coating | 35 mm |
| Length | 580 mm |
| Long. with vibrating table | 900 mm |
| Long. with CHOCOPLAK | 135 mm |
| Depth | 680 mm |
| Height | 1380 mm |
| Temper weight | 120 kg |
| Weight with carrier | 145 kg |